


Drip Pan Elbow

Cast Iron

Model	DPL
Sizes	3/4" through 8"
Connections	NPT, FLG
Body Material	Cast Iron
PMO Max. Operating Pressure	250 PSIG



DPL Flanged

Typical Applications

The DPL Drip Pan Elbow is used to collect and remove condensate. Typically used with steam boilers, pressure relief valves, safety valves and steam pressure vessels and lines.

Features

- Collects discharge condensate from steam systems
- Returns condensate to safe areas
- Increases life of safety valves
- Reduces discharge piping strain
- Female NPT or Flanged connections available

Sample Specification


Drip Pan Elbow shall be made of cast iron and conform to the Power Piping Code. It shall have a pan to collect condensate in the steam riser pipe and a drain to pipe away the condensate.

HOW TO ORDER

Specify pipe size needed for application.

MATERIALS

Body	Cast Iron
------	-----------

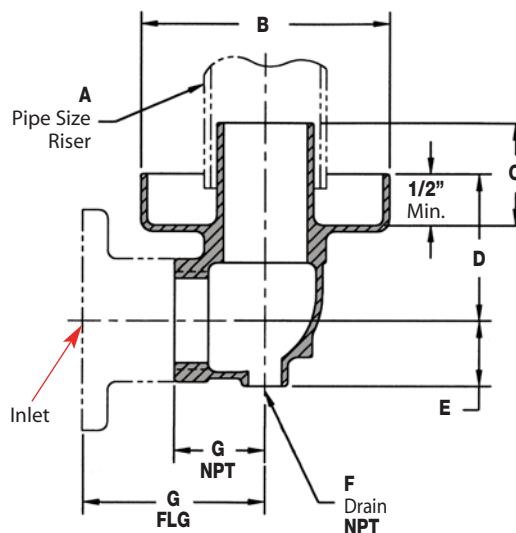

DIMENSIONS & WEIGHTS – inches

Size	Connection	Model Code	A	B	C	D	E	F	G	Weight (lbs)
3/4"	NPT	DPL-13-N	1 1/2	3 3/4	1 3/4	2 3/4	1 1/32	1/4	1 1/2	2
1"	NPT	DPL-14-N	1 1/2	3 3/4	1 3/4	2 3/4	1 1/32	1/4	1 1/2	2
1 1/4"	NPT	DPL-15-N	2	5 1/2	2 15/32	4 1/8	1 7/16	3/8	2 1/8	8
1 1/2"	NPT	DPL-16-N	2	5 1/2	2 15/32	4 1/8	1 7/16	3/8	2 1/8	8
2"	NPT	DPL-17-N	3	6 1/4	2 3/8	3 5/8	1 5/8	1/2	2 1/4	9
2 1/2"	NPT	DPL-18-N	4	7 3/8	3	4 5/16	1 15/16	3/4	2 11/16	13
3"	NPT	DPL-19-N	4	8	3 1/2	4 7/8	2 5/16	3/4	3 1/8	19
4"	NPT	DPL-20-N	6	9 5/8	4 1/2	5 3/4	2 7/8	3/4	3 3/4	28
6"	125# FLG	DPL-22-F125	8	12 3/4	6 5/8	7 9/16	4 3/16	3/4	8	105
8"	125# FLG	DPL-23-F125	10	16 1/2	7 1/2	8 9/16	5 3/8	1	10 3/4	202

Note: DPL is sized to outlet connection of SRV (safety relief valve).