

**Stainless Steel**

Model Code	<b>WVBSS-12-N</b>
Sizes	<b>1/2"</b>
Connections	<b>NPT</b>
Body Material	<b>Stainless Steel</b>
PMO Max. Operating Pressure	<b>300 PSIG</b>
TMO Max. Operating Temperature	<b>752°F</b>
PMA Max. Allowable Pressure	<b>300 PSIG up to 752°F</b>
TMA Max. Allowable Temperature	<b>752°F @ 300 PSIG</b>



**Typical Applications**

The **WVBSS** Vacuum Breaker is used on heat exchangers, air coils, jacketed kettles, pressing machines, boiler feed water tanks, sparge systems, water lines, or anywhere else an unwanted vacuum may occur. The WVBSS allows air to enter the system in order to "break the vacuum" caused by the condensing of steam or draining of liquid from a system. The elimination of vacuum is necessary to allow proper drainage of liquid from process systems.

**How It Works**

The Vacuum Breaker functions like a simple check valve. Outside air is allowed to enter the system through the air inlet. However, when steam or water try to escape, the vacuum breaker closes off tightly.

**Features**

- All stainless steel construction
- Small and compact

**Sample Specification**

Vacuum Breaker shall be all stainless steel construction.


**Installation**

Unit must be installed in a vertical position and should be placed at the highest point in the system.

**MATERIALS**

Body	Stainless Steel, Series 300
Ball	Hardened Stainless Steel
Nameplate	Stainless Steel, Series 300

**DIMENSIONS – inches**

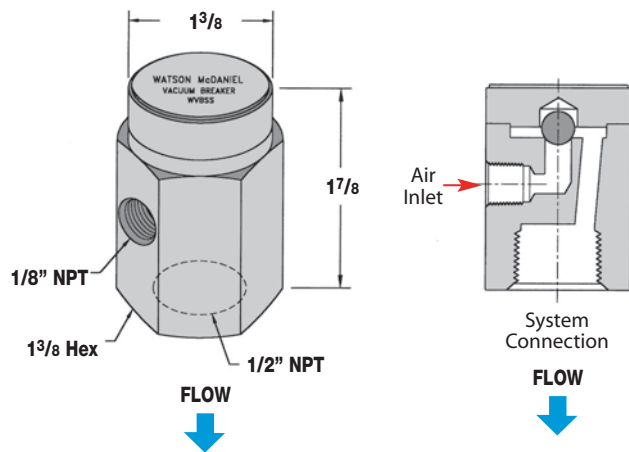

**CAPACITIES – Air (SCFM)**

Size NPT	inches Hg Vacuum					
	2	4	6	8	10	12
1/2"	2.4	3.4	4.0	4.3	4.7	4.9